



Willamette Valley Company
www.wilvaco.com
800.333.9826

Partnering through service,
innovation, and integrity

FastPatch HPRE

High Performance Rail Encapsulator

DESCRIPTION

FastPatch HPRE is a composite polyurethane, rail encapsulation system with patent pending integrated aggregate. HPRE is specifically designed for embedded rail applications and provides excellent electrical isolation, resilience, and vibration and sound damping. HPRE is designed to be meter-applied but may also be installed using pail kits.

WHERE TO USE

- Embedded Track - between rail and concrete
- Special Track - intersection and stations
- Concrete Repair – spalls and large cracks

FEATURES AND BENEFITS

- Rapid cure - fast return to service
- 100% Solids, No Odor or VOC
- Integrated Aggregate – no need for gravel bags
- Excellent Concrete Adhesion
- Electrical Isolation
- Sound and Vibration Damping
- Self leveling
- 4.0 gal/min application rate from WV-651 at 70°F

PACKAGING

4.0-gallon (0.5 cu.ft.) Kits – Pail & Pouch
250-Gallon Totes

COLORS

Gray

SHELF LIFE

1 year when properly stored.

STORAGE

Store and ship this product in clean, dry, low-humidity, and shaded or covered environments between 50 and 90°F (10-32°C)



TYPICAL PROPERTIES

HPRE Full Composite Properties (polymer and aggregate)		
Adhesion to concrete, psi (MPa), ASTM D7234, unprimed	≥350 (2.4)*	
Adhesion to steel rail, psi (MPa), ASTM D4541, unprimed	≥300 (2.1)	
Elongation, %, ASTM D412, full cure	≥20	
Tensile Strength, psi, ASTM D412, full cure	400	
Thermal compatibility to concrete, ASTM C884	pass	
Surface resistivity, Ω/square, ASTM D257-14 (500V)	4.56E+14	
Volume resistivity, Ω*cm, ASTM D257-14 (500V)	1.66E+14	
Kit working time, min.	Kit tack-free time, min.	Kit temp.
8	30	104°F (40°C)
10-12	60	77°F (25°C)
12-14	90	59°F (15°C)
Ultimate hardness, Shore D, ASTM D2240	55-60	
VOC, lbs/gal (g/L), ASTM D2369	0	
Viscosity, cP, ASTM D4878, Mixed	6,000	
Service temperature, °F (°C)	-40 - 185 (-40 - 85)	
ASTM C579 Compression Strength vs Cure Time		
	2" cubes	3"x6" cylinders
3 hours RT	1,500 psi	810 psi
24 hours RT	1,600 psi	1,300 psi
1 week RT	2,900 psi	2,100 psi

*Concrete cohesive failure mode. Limiting factor for HPRE concrete adhesion is the substrate quality.

HPRE Polymer Only Properties (no aggregate)

Compressive Set, %, ASTM D395 3 rd incremental set (24hr 70°C)	5
Shore hardness, ASTM D2240, full cure	85-90A, 40-45D
Elongation, %, ASTM D412, full cure	≥ 75
Tensile Strength, psi, ASTM D412, full cure	≥ 900

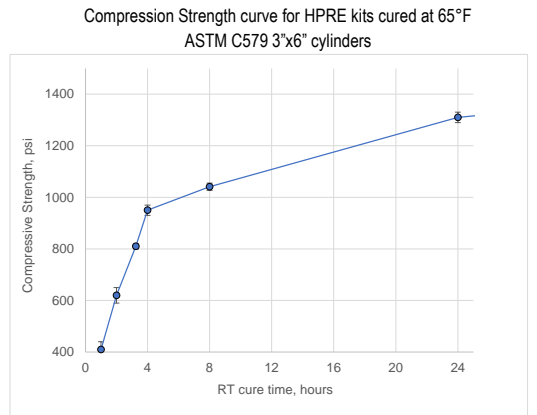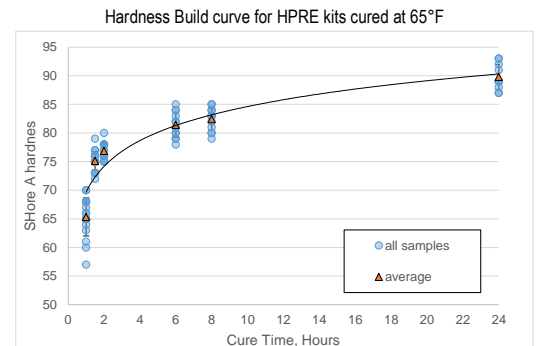

HPRE Chemical Resistance, ASTM D471, 70°F, 7 Day Immersion

	$\Delta\%$ volume	$\Delta\%$ weight
water	no change	0.73 \pm 0.09
10% NaCl	no change	0.87 \pm 0.10
5% NaOH	no change	0.65 \pm 0.09
10% CaCl ₂	no change	0.70 \pm 0.10
5% H ₂ SO ₄	no change	0.635 \pm 0.019
IRM-901 (oil #1)	no change	0.24 \pm 0.05
IRM-902 (oil #2)	no change	0.32 \pm 0.02
IRM-903 (oil #3)	no change	0.443 \pm 0.012
Jet A	no change	0.59 \pm 0.03
JP-4	2.2 \pm 1.0	1.5 \pm 0.2

APPLICATION INSTRUCTIONS

SURFACE PREPARATION:

Concrete

1. The concrete must be structurally sound, clean, and the surface should be dry. HPRE can be applied to concrete newer than 28 days and in some cases as soon as 24 hours from when the concrete was poured. Contact your WVCO representative for more details.
2. Concrete surfaces must be free of dirt, moisture, loose particles, oil, asphalt, tar, paint, wax, rust, waterproofing and curing/parting compounds, membranes, and any previously installed materials or other foreign matter. Laitance and efflorescence must be removed prior to installation.
3. Clean concrete surfaces by grinding, abrasive blasting, wire brushing, saw cutting, or other appropriate method.

Steel

1. Steel surfaces must be cleaned before blasting according to SSPC-SP1. Remove any sharp edges and other surface imperfections.
2. Dry abrasive blast surface according to SSPC SP-6/NACE No. 3 Commercial Blast (minimum).
3. Test the surface for non-visible soluble salt contamination according to NACE 6G186. If necessary treat with CHLOR*RID or equivalent salt remover until less than 3ug/cm2 is detected.

PRIMING:

1. Priming all surfaces is always recommended as it will optimize adhesion and durability. Prime with POLYQuik® POLYPRIME or other WVCO approved primer. Contact WVCO for more details about appropriate primer selection.
2. Refer to the primer Technical Data Sheet and the [POLYQuik® Primers Installation Guideline](#) for detailed primer application instructions.

PROCESSING:

1. Use WVCO/Pre-Tec (or equivalent) meter at 6:1 volume ratio. Always use approved static mix tubes
2. For specific questions about your metering equipment contact your WVCO representative or customer support.
3. Whenever possible, condition all HPRE components (resin, iso, and aggregate) to 70°F (21°C) before application.
4. At ambient temperatures \leq 40°F (5°C), HPRE components may be conditioned to 100°F (38°C) to aid in cure speed.
5. Mechanically mix the HPRE resin component for at least 30 minutes or until well mixed before application. It is particularly important to mix the HPRE resin if it has been allowed to sit in storage for an extended period of time.
6. Test the performance of the meter and HPRE before applying into the work area. It is recommended a small portion of material is dispensed into a cup and the material cure time and color/mixing monitored for uniformity and conformance at the start of each work period. Do not proceed with application into the work area if the initial test does not cure properly.
7. Static mix tubes should be replaced if application stops for longer than 5 minutes or if material flow is restricted.
8. Rail systems and geometries are varied. It is the responsibility of the installer to determine the most appropriate application method for the specific work project parameters.

NOTE: HPRE is cured to the touch ('tack-free') by approx. 60 minutes at 70°F (21°C). Colder temperatures will extend the cure time, warmer temperatures will shorten the cure time.

NOTE: HPRE surface may discolor with UV exposure. UV discoloration does not impact any aspect of material performance.

NOTE: WVCO recommends installing a transverse control joint every 10-12 ft. for large contiguous HPRE installations. Contact your WVCO representative for more details on recommended installation procedures and practices.

HEALTH AND SAFETY

Before handling, you should become familiar with the Safety Data Sheet (SDS) regarding the risks and safe use of this product. To obtain an SDS, please call 800-333-9826 or send an email to: msds@wilvaco.com.

DISCLAIMER OF WARRANTY
TEST RESULTS ARE TO BE CONSIDERED AS REPRESENTATIVE OF CURRENT PRODUCTION AND SHOULD NOT BE TREATED AS SPECIFICATIONS. WHILE ALL THE INFORMATION PRESENTED IN THIS DOCUMENT IS BELIEVED TO BE RELIABLE AND TO REPRESENT THE BEST AVAILABLE DATA ON THESE PRODUCTS, NO GUARANTEE, WARRANTY, OR REPRESENTATION IS MADE, INTENDED, OR IMPLIED AS TO THE CORRECTNESS OR SUFFICIENCY OF ANY INFORMATION, OR AS TO THE SUITABILITY OF ANY CHEMICAL COMPOUNDS FOR ANY PARTICULAR USE, OR THAT ANY CHEMICAL COMPOUNDS OR USE THEREOF ARE NOT SUBJECT TO A CLAIM BY A THIRD PARTY FOR INFRINGEMENT OF ANY PATENT OR OTHER INTELLECTUAL PROPERTY RIGHT. EACH USER SHOULD CONDUCT A SUFFICIENT INVESTIGATION TO ESTABLISH THE SUITABILITY OF ANY PRODUCT FOR ITS INTENDED USE. PROPER APPLICATION IS THE RESPONSIBILITY OF THE USER. AS WITH ANY PRODUCT THE USE OF THIS PRODUCT IN A GIVEN APPLICATION MUST BE TESTED (INCLUDING BUT NOT LIMITED TO FIELD TESTING) IN ADVANCE BY THE USER TO DETERMINE SUITABILITY. TESTING IS THE REQUIREMENT OF BOTH ENGINEERS AND CONTRACTORS ALIKE. WVCO DOES NOT WARRANT THE APPLICATION UNDER ANY OR ALL CIRCUMSTANCES.

WILLAMETTE VALLEY COMPANY
www.wilvaco.com info@wilvaco.com

DIVISIONS

WESTERN DIVISION

990 Owen Loop North
PO Box 2280
Eugene, OR 97402
Tel 541.484.9621
www.POLYQUIK.com
www.SPIKEFAST.com

EASTERN DIVISION

6662 Marbut Road
Lithonia, GA 30058
Tel 888.878.9826

MIDWEST DIVISION

1549 Hwy 2
Two Harbors, MN 55616
Tel 218.834.3922

PRECISION TECHNOLOGIES DIVISION

990 Owen Loop North
Eugene, OR 97402
Tel 541.484.2368
www.pre-tec.com

SOUTHERN DIVISION

100 Dixie Mae Drive
PO Box 4450
Pineville, Louisiana 71361
Tel 318.640.5077

SUBSIDIARIES

ECLECTIC PRODUCTS INC.

Corporate Office
990 Owen Loop North
Eugene, OR 97402
Tel 541.284.4667
www.eclecticproducts.com

IDAHO MILL & GRAIN

445 North 430 West Hwy
PO Box 188
Malad City, Idaho 83252
Tel 208.766.2206

TAPEL WILLAMETTE LTD. S.A.

Av. Estero La Posada 3625
Parque Industrial Coronel
Coronel, Chile
Tel 011.56.41.2.928.100
www.tapel.cl



W07-R&D-TDS-097
REV 02
Revision Date: July 2018